

# CITY OF TUCKER

## ACKNOWLEDGE RECEIPT OF ADDENDUM #1

ITB #2025-009

MOUNTAIN INDUSTRIAL BOULEVARD AT HUGH  
HOWELL ROAD INTERSECTION IMPROVEMENT  
PROJECT P.I. #0015216

**Please complete this page ONLY and include in your submittal.**

**I hereby acknowledge receipt of the supplement pertaining to the  
above referenced bid.**

**COMPANY NAME:** \_\_\_\_\_

**CONTACT PERSON:** \_\_\_\_\_

**ADDRESS:** \_\_\_\_\_

**CITY:** \_\_\_\_\_ **STATE:** \_\_\_\_\_ **ZIP:** \_\_\_\_\_

**PHONE:** \_\_\_\_\_ **FAX:** \_\_\_\_\_

**EMAIL ADDRESS:** \_\_\_\_\_

**SIGNATURE**

**DATE**

ITB #2025-009  
ADDENDUM #1

**This addendum contains:**

- **Responses to Questions received**
- **Specifications for Handrail Fencing**


	<b>QUESTION</b>	<b>ANSWER</b>
1	Will a pay item be added for the directionally bored conduit (Conduit, NonMetal, TP 3, 2 In) as is typical? If to be included in directional bore, will the city confirm the bore quantity shall be measured from pull box to pull box?	A pay item will not be added for the NonMetal conduit. Please include the fee for the conduit in pay items 682-9950. Measurement shall be from the center of pull box to the center of pull box.
2	Will a pay item be added for traffic signal timing?	No. Traffic Signal Timing shall be coordinated with the City.
3	We need a UAS to properly bid the time on the project. This would include all utilities impacted. Will this be provided?	UAS are currently being developed by respective utility owners. This will be provided to the selected contractor. Considerations to the schedule will be reviewed once UAMs are received.
4	Typically these types of projects are bid per actual quantities not lump sum. Will this project be paid per items actually completed?	Yes, this project is <u>not</u> lump sum and should be paid per items actually completed. There will be an on-site inspector to confirm quantities with.
5	Does waterline contractor have to be prequalified by the city or county?	The selected contractor will need to coordinate with DeKalb Watershed whom provides a list of authorized vendors.
6	Do all subs have to be on the GDOT prequalified contractor/subcontractor list?	Yes.
7	How will weather days be calculated on the contract?	Weather will not be accepted as a justifiable reason for extension of time unless such should be abnormal. The following chart represents the number of calendar days per month that are considered normal for rain and wet ground conditions preventing work from being performed. Days not worked due to rain or wet ground conditions beyond those listed may be considered for claims for adjustment of time. The contractor shall reconcile requests for time extension within 5 business days of the completion of each month if additional time is merited due to adverse weather conditions.

# ITB #2025-009

## ADDENDUM #1

		January .....12 February.....11 March.....10 April.....8 May.....6 June.....7 July.....7 August.....6 September....5 October.....4 November....7 December....9
8	Handrail detail contradicts pay item description. Will a handrail detail be provided?	Yes.
9	Will the required walls require anti-graffiti ?	Yes.

- The following specifications replace / supersede any references to handrails in the published plans.

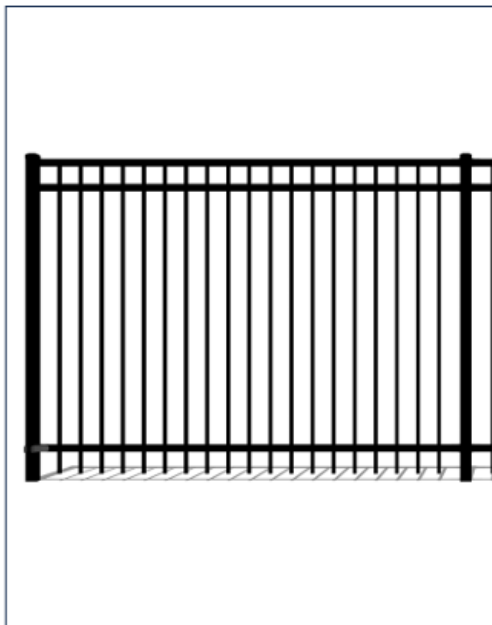

### **FENCING OPTION A**

Brand: Ameristar

Model: Montage Plus - Majestic

Color/finish: Black

Website: <https://www.ameristarperimeter.com/us/en/products/ornamental-fence-gates/montage/montage-plus>

Website:

[www.ameristarperimeter.com/us/en/products/ornamental-fence-gates/montage/montage-plus](https://www.ameristarperimeter.com/us/en/products/ornamental-fence-gates/montage/montage-plus)